



OlenBox series

XL



ULTRA COMPACT



LIGHT WEIGHT



DESIGNED TO ENDURE



NO MAINTENANCE



USABLE IN ALL DIRECTIONS



UNLIMITED ASSEMBLY

WARRANTY
5
YEARS

olenergies

TECHNICAL SHEET

#1 WORLD RECORD
WORLD'S DENSEST
SMART LFP BATTERY

POWERFUL

24
V

130
Ah

3.33
kWh

DURABLE


LITHIUM

LFP-HP

MADE IN FRANCE



DIMENSIONS

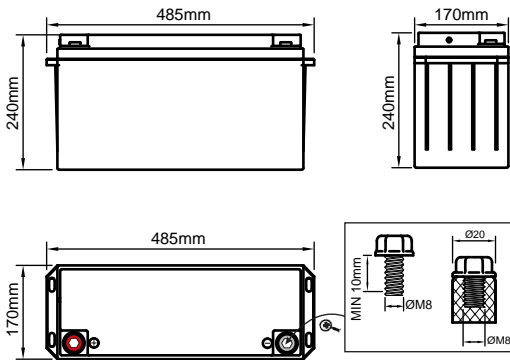

THE MOST INNOVATIVE BATTERY ON THE MARKET

Battery connected



Control and monitor your battery using your smartphone!

Use the application to configure, monitor, update and diagnose your battery.
Real-time vision, complete control.

Remote monitoring



Your battery accessible 24/7 from every part of the world

Supervise, manage and optimize your OlenBox remotely and detect potential problems by setting alerts and alarms.
You are always in control from anywhere in the world.

Active balancing!



Boosted performance and lifetime

BOOST is a unique active and passive balancing technology. This guarantees a permanent and optimal internal balancing. Energy is transferred to the cells that need it.

Extreme temperature resistant



Automatic preheating in very cold temperatures

During the charge **AND** during the discharge!
Don't worry about the outside temperature, the battery takes care of everything automatically!

Working temperature -30°C | +65°C Storage +15°C | +35°C

MADE IN FRANCE INNOVATION

- ✓ High Performance Lithium LFP Technology
- ✓ Designed to last 20 years
- ✓ From 4,000 to 12,000 cycles (refer to curves)
- ✓ Smart-IoT Battery
- ✓ Fast charge
- ✓ Built-in safety mechanisms
- ✓ Designed for both hot and cold climates
- ✓ 60% lighter than a lead acid battery
- ✓ Compatible with MERLIN smartbox!

APPLICATIONS

- Lighting & Instrumentation**
Lighting, Camera, Energy case, Weather, Pumping...
- Martitime, mobility and robotics**
Boats, Recreational vehicles, Robots, Trolleys...
- Critical power supply**
UPS, Datacenter, Measurement, Medical...
- Solar storage**
Self-consumption, renewable energies...

QUALITY

- ✓ Certifications: CE, RoHS, UN38.3 (cells)
- ✓ Manufacturer warranty: 5 years
- ✓ Manufacturing country: France

SPECIFICATIONS


Electrical		Mechanical	
Rated voltage	26.0 V	Casing material	ABS
Rated capacity	128.0 Ah	Dimensions (W*D*H)	485*170*240 mm
Energy	3.33 kWh	Weight	27.50 kg
Internal resistance	< 14.0 mΩ	Terminals	M8
Monthly self discharge	< 3 %	Ingress protection code	IP65
Charge		Discharge	
Charge efficiency	> 98 % @0.2C	Discharge efficiency	> 96% @0.5C
Charge voltage	29.0 ± 0.1 V	Direct discharge current	130 A
Charge mode	CC/CV	Maximum current 10 sec.	390 A
Rated charge current	65.0 A	Minimum voltage	20.0 V
Charge cut-off current	0.05C	Configurable thresholds	Yes
Lead-acid chargers & alternators	Compatible	Exceeding power	On quotation

Cluster your batteries wirelessly, add a display, pilot relays or add a GPS with MERLIN smartbox!



CAN/RS485 equipments

MERLIN is sold separately



SMART BMS
INSIDE



Lead acid
Plug-&-Play



Charge: 65A
-30°C | +50°C



Discharge: 130A
-30°C | +65°C



Rated values
26V | 128Ah



Cells conform to
UL STD 1642



RoHS



Li-ion



CURVES PROFILES



SAFE
DURABLE
POWERFUL

- ✓ 4,000 cycles @80% DoD @80% SoH
- ✓ 8,000 cycles @70% DoD @70% SoH
- ✓ 12,000 cycles @60% DoD @80% SoH



Longest service life on the market

Our systems are design to last up to 25 years, providing the lowest Total Cost of Ownership (TCO).



Eco-friendly

Circular Economy product.
Recyclable battery containing neither lead nor cobalt.



100% secure

LFP-HP chemistry is intrinsically safe and the BMS protect the battery. No risk of fire or deflagration.



Onboard intelligence

Our intelligent BMS detects any anomaly.
Connected batteries = 24/7 monitoring & supervision.



Fast charge

There is no need to follow a sequential curve.
Charging efficiency is close to 100%.




Extreme temperature resistant


Olenergies systems are always the technological best choice for both hot and cold environments.

LIFETIME CURVES

State of Health (SoH) related to the number of cycles for different Depths of Discharge (DoD) @1C and 25°C

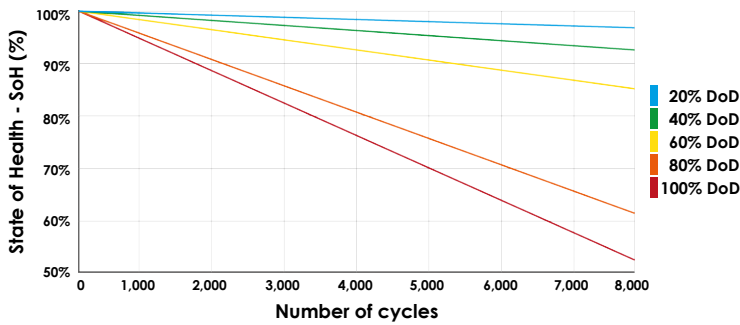


State of Health (SoH) related to the number of cycles for different temperatures @1C and 100% DoD

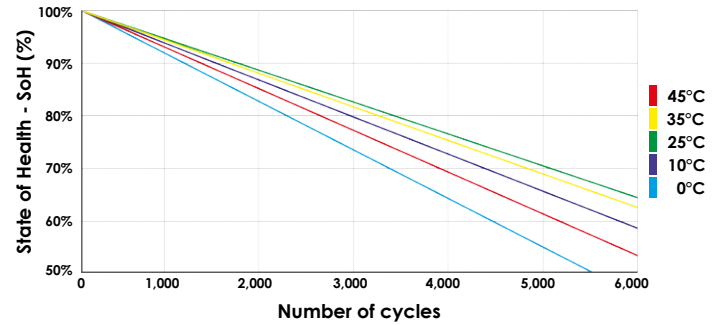


DISCHARGE CURVES

Voltage curves @25°C for various discharge currents

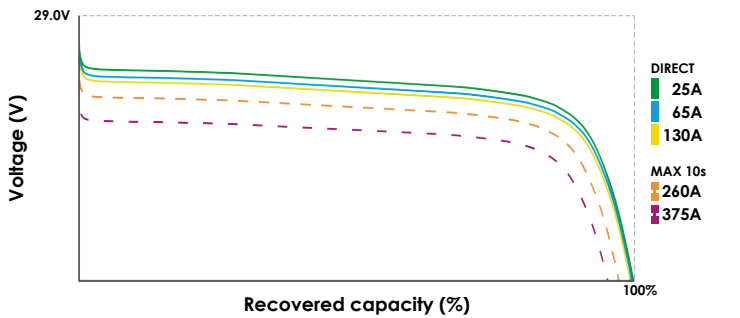


Voltage curves @C/5 for various temperatures

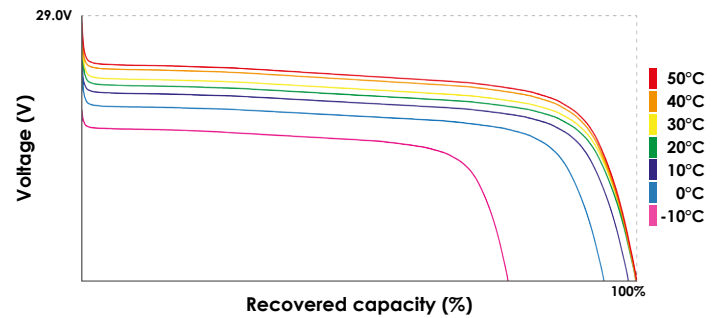

CHARGE CURVE

Constant Current/ Constant Voltage (CC/CV) recommended charge

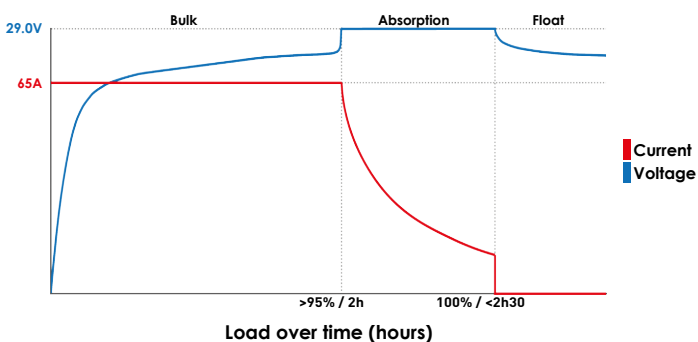

SELF-DISCHARGE CURVE

Self-discharge according to time and storage temperature

